


# RouterBOARD R52Hn

## 802.11a/b/g/n dual band miniPCI card

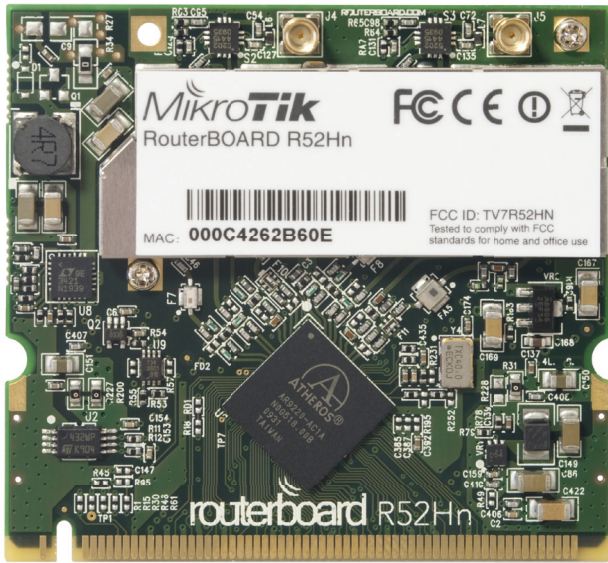

- Dual band IEEE 802.11a/b/g/n standard
- Output Power of up to 25dBm @ a/g/n Band
- Support for up to 2x2 MIMO with spatial multiplexing
- Four times the throughput of 802.11a/g
- Atheros AR9220, chipset
- High Performance (up to 300Mbps physical data rates and 200Mbps of actual user throughput) with Low Power Consumption
- 2 X MMCX Antenna Connector (J4 - Chain 0)
- Modulations:
  - OFDM:** BPSK, QPSK, 16 QAM, 64QAM
  - DSSS:** DBPSK, DQPSK, CCK
- Operating temperatures: -50°C to +60°C
- Idle power consumption 0.4W
- Max power consumption 7W
- MiniPCI IIIA+ design (3mm longer than MiniPCI IIIA)
- 1.5mm heatsink, 3mm RF shield thickness
- ±10KV ESD protection on RF ports

RouterBOARD R52Hn miniPCI network adapter provides leading 802.11a/b/g/n performance in both 2GHz and 5GHz bands, supporting up to 300Mbps physical data rates and up to 200Mbps of actual user throughput on both the uplink and downlink. 802.11n in your Wireless device provides higher efficiency for everyday activities such as local network file transfers, Internet browsing, and media streaming. R52Hn has a high power transmitter, bringing you even more range.

802.11b	RX Sensitivity	TX Power
1Mbit	-93	24
11Mbit	-93	24
802.11g		
6Mbit	-94	25
54Mbit	-81	22
802.11n 2.4GHz		
MCS0 20MHz	-94	25
MCS0 40MHz	-92	24
MCS7 20MHz	-78	21
MCS7 40MHz	-75	20

802.11a	RX Sensitivity	TX Power
6Mbit	-97	25
54Mbit	-80	21
802.11n 5GHz		
MCS0 20MHz	-97	24
MCS0 40MHz	-92	22
MCS7 20MHz	-77	18
MCS7 40MHz	-74	17

### Data Rates

802.11b	
	11Mbps; 5.5Mbps; 2Mbps; 1Mbps
802.11a/g	
	54Mbps; 48Mbps; 36Mbps; 24Mbps; 18Mbps; 12Mbps; 9Mbps; 6Mbps
802.11n	
20MHz	1Nss: 65Mbps @ 800GI, 72.2Mbps @ 400GI (Max.) 2Nss: 130Mbps @ 800GI, 144.4Mbps @ 400GI (Max.)
40MHz	1Nss: 135Mbps @ 800GI, 150Mbps @ 400GI (Max.) 2Nss: 270Mbps @ 800GI, 300Mbps @ 400GI (Max.)